

Application field:


- * Feed gas ozone generator.
- * Water treatment and purification.
- * Pulp and paper industry
- * Chemical industry, Hospital, etc

Production characteristic :

- 1 It can free the trouble of changing oxygen bottle for small type ozone generator.
- 2 Produce oxygen at purity of 90-93%.
- 3 Low cost operation.

Production Table :

Model	Capacity	Power Supply	Power	Net Weight	Size (L*W*H)
OZ-3	3L/min	220V/50Hz	400Watt	40Kg	450*340*680
OZ-6	6L/min	220V/50Hz	500Watt	50Kg	500*420*760
OZ-8	8L/min	220V/50Hz	500Watt	50Kg	500*420*760
OZ-12	12L/min	220V/50Hz	1000Watt	100Kg	600*1200*900
OZ-16	16L/min	220V/50Hz	1000Watt	100Kg	600*1200*900
OZ-24	24L/min	220V/50Hz	1500Watt	140Kg	600*1600*900
OF-2	2m ³ /h	220V/50Hz	250Watt	115Kg	850*560*1200
OF-3	3m ³ /h	220V/50Hz	250Watt	120Kg	850*500*1200
OF-4	4m ³ /h	220V/50Hz	2000Watt	200Kg	760*1000*1300

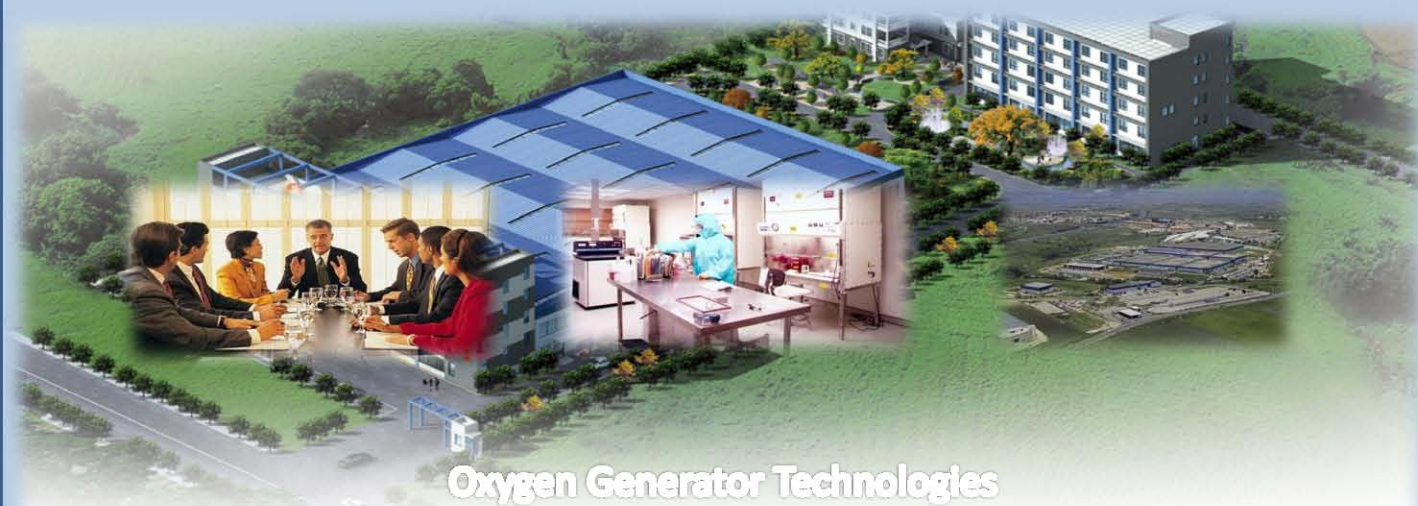



OZ-3 Series



OZ-6 Series



OZ-8 Series



OZ-12 Series



OZ-16 Series



OZ-24 Series



OZ-2 Series